

## PFM700

### HDMI Extender



### Features

- Power supply: Input voltage DC5V.
- Transmission effect: Real-time transmission HDMI video signal, no delay, strong anti-interference.
- Transmission distance: HDMI transmission distance 60M (max)
- Main functions: Use single UTP (CAT-5E and CAT-6) transmit 1-ch HDMI video signal: support HDMI 1.3.
- Protection and anti-interference: Excellent anti-thunder, anti-static and anti-interference capabilities.
- Appearance structure: No need to install driver program and set network parameters, easy to use and convenient to install.


# PFM700

## Specifications


<b>Model</b>	<b>PFM700</b>
<b>Properties</b>	
Transmission Signal	1channel HDMI
Transmission Distance	60M(max)
<b>Video Transmission Properties</b>	
Video Signal Input Interface	HDMI interface
Video Input Interface	HDMI interface
Twisted-pair Video Transmission Port	RJ45 port
Input Voltage	DC5V
Power	TX<3W, RX<3W
HDCP Version	Support HDCP1.2
HDMI Version	Support 1.3 and lower version
<b>Resolution Output Signal</b>	
Resolution	1080P/1080I/720P/576P/576I/480P/480I
Output Voltage	0.5~1.5Vp-p
<b>Protection</b>	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per: IEC61000-4-2 1995(GB/T 17626.5)
Anti-thunder	1KV
	Per: IEC61000-4-5 1995(GB/T 17626.5)
<b>Stability</b>	
MTBF	>5000H
<b>Physical Properties</b>	
Dimension(L*W*H)	Transmitter: 88mm×64mm×25mm(port length included) Receiver: 88mm×64mm×25 mm
Shell	Aluminum
Color	Black
N.W.	Transmitter: 97g Receiver: 91g
<b>Environmental</b>	
Working Temperature	0-55℃
Storage Temperature	-20~80℃
Humidity	0~95%(non-condensing)

# PFM700

## Dimensions (mm)

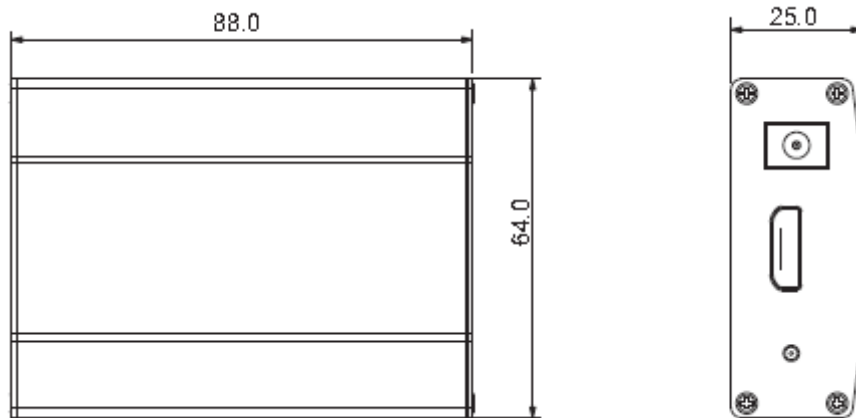

## Application

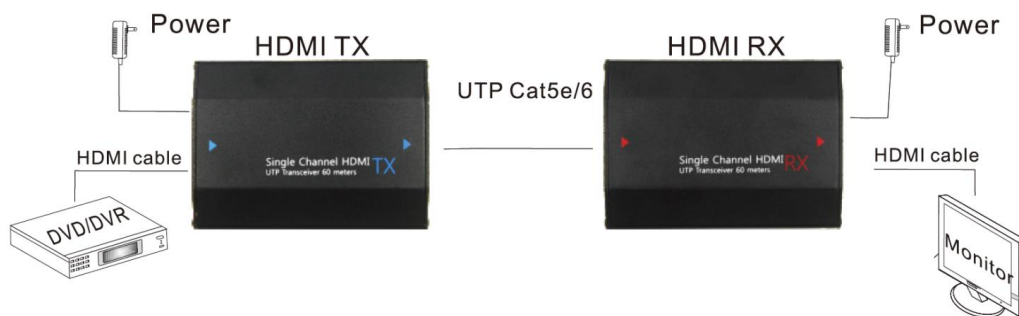

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.